

Monessen Vent Free Gas Fireplace Systems and Inserts

# CONVENIENT OPTIONS TO FIT YOUR STYLE





Chesapeake CFX24WM

## CHOOSE THE FIREPLACE THAT'S RIGHT FOR YOU

Our Monessen vent free fireplaces offer flexible installation and a lineup so versatile, you're sure to find the model that's right for you. We've got everything from compact models, perfect for smaller rooms, to larger models with more heating power, from styles to suit the traditionalist in you, to linear units for that modern look you've been craving. Check out the advantages of a vent free fireplace from Monessen below:

### MAXIMIZE SAVINGS WITH UNBEATABLE EFFICIENCY

Vent free gas fireplaces, available in natural gas and propane designs, are a safe, green and energy efficient way to add heat to your home — in fact, they're 99.9% energy efficient. Because they are vent free, none of the heat gets lost up a vent, flue or chimney. Instead, fuel dollars get transformed into heat-warming energy. Plus, you'll always have the assurance of a heat source in the event of a power outage.

### FREEDOM TO INSTALL ALMOST ANYWHERE

Because vent free fireplaces are designed to be installed and operated without a chimney, flue or vent, they can be located in areas where it would be impossible to install a vented fireplace. They provide the most economical of any heating option, because they only require a connection to a gas line.

### ZERO CLEARANCE FOR ULTIMATE FLEXIBILITY

Monessen vent free fireplaces allow for zero clearance installation, which means they may be installed flush against any combustible surface such as drywall or wood. This gives you added flexibility and helps save installation dollars when deciding where to install your fireplace, whether on an interior or exterior wall, or even in a corner.

(It is important to remember that the appliance should be sized to fit the area in which it is to be installed and must meet any additional regional or local requirements.)

AVFL Artisan with Driftwood Logs  
and Black Texture Face



## STYLE MEETS EFFICIENCY



### Artisan (AVFL Series)

The Monessen Artisan vent free fireplace is the perfect solution when you want to add a modern fireplace to your home, without the nuisance of venting and renovation. Boasting 99.9% efficiency and an abundance of optional accessories to customize your style, the Artisan heats up to 1400 square feet beautifully. Choose the stylish driftwood log set, rustic stone kit, shimmering iceberg glass, or go minimalist with just a coating of crushed fireglass, and transform the unit to suit your space.

#### Fireglass Options



Diamond



Onyx



Sapphire



Bronze



Stone Kit



Kentucky Blue  
Iceberg Glass



Diamond  
Iceberg Glass



Sesame  
Iceberg Glass

#### Finishing Options



Black Inside  
Trim Kit



Wide Contemporary Faces  
Stainless  
Steel



Wide Contemporary Faces  
Black  
Textured



Rope Light Kit  
(effect)



## TAKE HOME A BEST-SELLER

### Chesapeake (CFX Series)

This best-selling model comes complete with firebox, strikingly realistic log set, and decorative filigree face. Installation is worry free whether in the wall or in our beautifully crafted Barrington cabinet. With the Chesapeake vent free system, it's never been easier to add a fireplace to your home.

#### Quick Look:

- Triple Play Burner System® with loose embers glowing logs and yellow flames
- Your choice of Dark Walnut or Unfinished Cabinet, or purchase the unit only; no cabinet required
- Decorative filigree comes standard
- Up to 26,000 BTUs
- Available in 24" and 32" sizes
- Millivolt control (remote ready)

#### Interior Firebrick (Optional)



Cottage Clay Firebrick


#### Trim Options



Dark Walnut Cabinet (shown)



Unfinished Cabinet

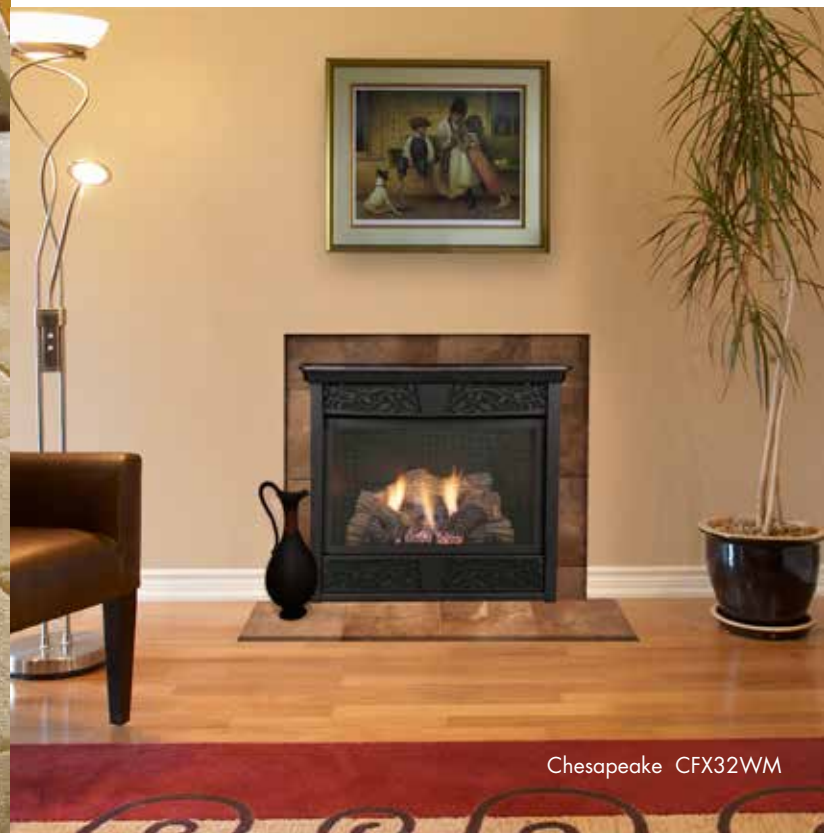



DFS Series

## STAY WARM AND COZY

### DFS Series

This full-size fireplace system provides ample heat for large rooms and also offers a variety of finishing options for a custom look.

#### Quick Look:

- Triple Play Burner System® with loose embers, glowing logs and yellow flames
- Removable unitized louver system
- 34,000 – 38,000 BTUs
- Fixed screen
- Concealed controls
- Black trim kit & louvers
- Available in 32" and 36" sizes
- Millivolt control (remote ready)

#### Interior Firebrick Options



Cottage Clay Firebrick (shown)

#### Optional Trim



Black Trim



Classic Faces

#### Cabinet Options



Barrington Dark Walnut Wall Cabinet



Barrington Unfinished Wall Cabinet



Honey Oak Wall or Corner Cabinet\*



Dark Cherry Wall or Corner Cabinet\*

\*Available by special order.

## SMALL IN SIZE, BIG IN HEATING CAPABILITY

### DFX Series

With its compact design, the DFX fireplace system is perfect for smaller rooms and provides up to 26,000 BTUs of heating power.

#### Quick Look:

- Triple Play Burner System® with loose embers, glowing logs and yellow flames
- Ceramic fiber log set
- 22,000 – 26,000 BTUs
- Available in 24" or 32" sizes
- Removable unitized louver system
- Millivolt control (remote ready)
- Includes black trim & louvers
- All cabinet options available in wall and corner configurations



DFX Series

#### Interior Firebrick



Cottage Clay Firebrick

#### Cabinet Options



Barrington Dark Walnut Wall Cabinet



Barrington Unfinished Wall Cabinet



Unfinished Oak Wall Cabinet\*



Honey Oak Wall or Corner Cabinet\*



Dark Cherry Wall or Corner Cabinet\*

\*Available by special order.

# GIVE YOUR MASONRY FIREPLACE A FACE LIFT

## DIS Insert Series

A great way to convert your wood burning masonry fireplace into a more efficient heating system, this easy-to-install vent free insert fits most standard masonry fireplaces with a minimum opening of 24" high, 33" wide and 16½" deep. With 28,000 BTUs, it keeps up to 950 square feet warm and cozy.

### Quick Look:

- Triple Play Burner System® with loose embers, glowing logs and yellow flames
- Charred Timber log set
- 28,000 BTUs
- Millivolt control (remote ready)
- Removable unitized bottom louvers
- Standard blower

### Interior Firebrick



Cottage Clay Firebrick (shown)

### Trim Options



Black Surround (2 sizes)

Available in two sizes to attractively finish the gap between the masonry fireplace and the DIS Insert. Surround dimensions are: 43½"W x 33"H and 40¼"W x 36"H. At minimum, the face plate should extend at least ½" over the masonry opening.



DIS Insert Series

## Optional Accessories

### ADD POWERED HEAT CIRCULATION

Select the BLOT, BLO24T, or BLOTMC forced air blower to quietly circulate the heat of your vent free fireplace or insert around your living space.



The BLOT is a 160 cfm variable speed blower for use with your CFX32 or DFX32 systems.

The BLO24T is a 160 cfm variable speed blower for use with your CFX24 or DFX24 systems.

The BLOTMC is a 160 cfm variable speed blower for use with your DFS series fireplaces.

# Vent Free Gas Fireplace Systems




| ARTISAN AVFL42           |                                   |                    |                                 |                          |                                     |                    |                              |  |
|--------------------------|-----------------------------------|--------------------|---------------------------------|--------------------------|-------------------------------------|--------------------|------------------------------|--|
| BTU / HR                 | Up to 37,000 (NG) / 36,000 (LP)   |                    |                                 |                          |                                     |                    |                              |  |
| Actual Dimensions        | 43"W x 28"H x 13"D                |                    |                                 |                          |                                     |                    |                              |  |
| Dimensions (Framing)     | 44"W x 32"H x 13½"D               |                    |                                 |                          |                                     |                    |                              |  |
| Viewing Area             | 37½"W x 13¼"H (497 sq in)         |                    |                                 |                          |                                     |                    |                              |  |
| Optional Blower          | —                                 |                    |                                 |                          |                                     |                    |                              |  |
| CHESAPEAKE CFX24 (U, DW) |                                   | CHESAPEAKE CFX24WM |                                 | CHESAPEAKE CFX32 (U, DW) |                                     | CHESAPEAKE CFX32WM |                              |  |
| BTU / HR                 | Up to 22,000 (NG & LP)            |                    | Up to 22,000 (NG & LP)          |                          | Up to 26,000 (NG & LP)              |                    | Up to 26,000 (NG & LP)       |  |
| Actual Dimensions        | 52½"W x 44"H x 15"D (Inc Cabinet) |                    | 24½"W x 26½"H x 11⅞"D x 14"RW   |                          | 61½"W x 50¼"H x 18¼"D (Inc Cabinet) |                    | 32"W x 30"H x 13⅞"D x 21¼"RW |  |
| Dimensions (Framing)     | —                                 |                    | 24¾"W x 26¾"H x 10½"D           |                          | —                                   |                    | 32½"W x 30¼"H x 12¼"D        |  |
| Viewing Area             | 19¾"W x 11¼"H (232 sq in)         |                    | 19¾"W x 11¼"H (232 sq in)       |                          | 26"W x 15¼"H (396 sq in)            |                    | 26"W x 15¼"H (396 sq in)     |  |
| Optional Blower          | BLO24T                            |                    | BLO24T                          |                          | BLOT                                |                    | BLOT                         |  |
| DFS32C                   |                                   | DFS36C             |                                 | DFS42C                   |                                     |                    |                              |  |
| BTU / HR                 | Up to 38,000 (NG) / 34,000 (LP)   |                    | Up to 38,000 (NG) / 34,000 (LP) |                          | Up to 38,000 (NG) / 34,000 (LP)     |                    |                              |  |
| Actual Dimensions        | 37"W x 34½"H x 18⅞"D              |                    | 41"W x 34½"H x 20⅞"D            |                          | 47"W x 34½"H x 20⅞"D                |                    |                              |  |
| Dimensions (Framing)     | 37¼"W x 35"H x 15½"D              |                    | 41¼"W x 35"H x 17½"D            |                          | 47¼"W x 35"H x 17½"D                |                    |                              |  |
| Front Opening            | 29⅞"W x 21¼"H                     |                    | 34"W x 21¼"H                    |                          | 40"W x 21¼"H                        |                    |                              |  |
| Radiating or Circulating | Both                              |                    | Both                            |                          | Both                                |                    |                              |  |
| Optional Blower          | BLOTMC                            |                    | BLOTMC                          |                          | BLOTMC                              |                    |                              |  |
| DFX24C                   |                                   | DFX32C             |                                 |                          |                                     |                    |                              |  |
| BTU / HR                 | Up to 22,000 (NG & LP)            |                    | Up to 26,000 (NG & LP)          |                          |                                     |                    |                              |  |
| Actual Dimensions        | 24½"W x 26½"H x 11⅞"D             |                    | 32"W x 30"H x 13⅞"D             |                          |                                     |                    |                              |  |
| Dimensions (Framing)     | 24¾"W x 26¾"H x 10½"D             |                    | 32½"W x 30¼"H x 12¼"D           |                          |                                     |                    |                              |  |
| Viewing Area             | 20"W x 11¼"H (234 sq in)          |                    | 26"W x 15¼"H (396 sq in)        |                          |                                     |                    |                              |  |
| Optional Blower          | BLO24T                            |                    | BLOT                            |                          |                                     |                    |                              |  |
| DIS (INSERT ONLY)        |                                   | SMALL SURROUND     |                                 | LARGE SURROUND           |                                     |                    |                              |  |
| BTU / HR                 | Up to 28,000 (NG & LP)            |                    | —                               |                          | —                                   |                    |                              |  |
| Actual Dimensions        | 33"W x 26¾"H x 16½"D x 22¾" RW    |                    | 43"W x 33"H                     |                          | 50"W x 36"H                         |                    |                              |  |
| Minimum Firebox Opening  | 33½"W x 27½"H x 16"D              |                    | —                               |                          | —                                   |                    |                              |  |
| Viewing Area             | 27"W x 14½"H (392 sq in)          |                    | —                               |                          | —                                   |                    |                              |  |
| Heating Area             | 950 sq. ft                        |                    | —                               |                          | —                                   |                    |                              |  |

## Cabinet Dimensions

| Product                                                        | Surround | A     | B     | C     | D     | E     | F     | G     | H     | I     |
|----------------------------------------------------------------|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Standard Wall Cabinet Mantels (Hearth Included with Cabinet)   |          |       |       |       |       |       |       |       |       |       |
| DFX24                                                          | WSH24    | 38 ⅛" | 14 ⅞" | 38"   | 13 ¾" | 26 ¼" | 24 ¾" | 26 ⅝" | 35 ⅝" | 6 ⅞"  |
| DFX32                                                          | WSH32    | 52"   | 16 ¾" | 48 ¼" | 13"   | 34 ⅞" | 32 ¾" | 30 ⅞" | 44 ⅝" | 6 ⅞"  |
| DFS32                                                          | WSHGC32  | 57 ¾" | 21"   | 49 ¾" | 18"   | 39 ¼" | 37 ¾" | 35 ⅞" | 52 ¼" | 5"    |
| DFS36                                                          | WSHGC36  | 61 ½" | 22 ¼" | 49 ¾" | 19 ⅜" | 43 ¼" | 41 ¾" | 35 ⅞" | 56 ¼" | 5"    |
| Standard Corner Cabinet Mantels (Hearth Included with Cabinet) |          |       |       |       |       |       |       |       |       |       |
| DFX24                                                          | CSH24    | 46"   | 32 ½" | 26 ¾" | 38"   | 26 ¼" | 24 ¾" | 26 ⅝" | 36"   | 13 ¾" |
| DFX32                                                          | CSH32    | 56 ⅜" | 40"   | 32 ⅝" | 48 ¼" | 34 ⅞" | 32 ¾" | 30 ⅞" | 43 ¼" | 18 ⅝" |
| DFS32                                                          | CSHGC32  | 62"   | 43 ⅞" | 35 ⅝" | 49 ¾" | 39 ¼" | 37 ¾" | 35 ⅞" | 57 ¼" | 5"    |
| DFS36                                                          | CSHGC36  | 67 ½" | 47 ¾" | 39 ⅞" | 49 ¾" | 43 ¼" | 41 ¾" | 35 ⅞" | 63"   | 5"    |

### Barrington

|              |        |       |     |       |       |    |       |     |   |   |               |             |       |
|--------------|--------|-------|-----|-------|-------|----|-------|-----|---|---|---------------|-------------|-------|
| DFX24, CFX24 | BWC300 | 52 ½" | 15" | 44"   | 34 ⅜" | 5" | 47 ⅝" | 30" | — | — | 26 ½" X 27"   | 24" X 23 ½" | 10 ½" |
| DFX32, CFX32 | BWC400 | 61 ⅞" | 18" | 50 ¾" | 34 ⅜" | 5" | 47 ⅝" | 30" | — | — | 35 ½" X 32 ¾" | 32" X 29"   | 14"   |

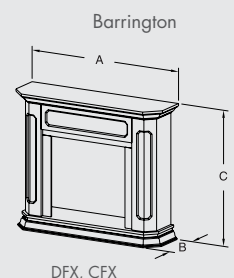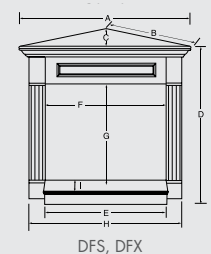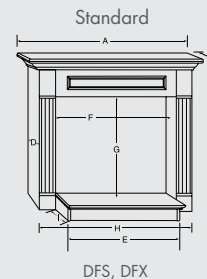

# ULTIMATE CONVENIENCE AT YOUR FINGERTIPS



Ambient Technologies® offers a variety of remotes and accessories designed to bring the convenience of fireplace controls to your fingertips.

On/off and thermostatic remotes are available from Ambient Technologies® for all Monessen vent free fireplaces. Consult your dealer to find the remote that's right for you, or visit [monessenhearth.com](http://monessenhearth.com) or [ambienttechnologies.com](http://ambienttechnologies.com).



Touch screen hand-held remote with 6 hour, count down timer, large LCD screen, battery receiver and wall cover plates.



Hand-held remote with battery receiver and wall cover plates.

The **Signature Command® System**, available on the **AVFL Series**, is the most feature enhanced and energy efficient fireplace control on the market today. With innovative options like cold climate pilot selection and the Smart Mode® feature, your fireplace will operate at peak efficiency, helping you conserve energy and save on fuel costs. Plus, features like automatic battery backup put the best of modern convenience at your fingertips. Enjoy your fireplace like never before with a unique combination of benefits you'll only find with Signature Command®.

## Featuring:

- A/C control with battery back-up
- Electronic ignition
- Hi/Lo 3 step flame adjustment
- Accent light with three step dimming
- Touch button command center
- Full function hand held touch screen remote control
- Comes standard with SCSACM A/C module



Touch screen hand held transmitter with On/Off, Hi/Med/Low flame adjustment, 6 hour countdown timer, thermostat with Smart Mode® option, 3 level blower, light adjustment and On/Off auxiliary control.



LOVE AT FIRST LIGHT

A brand of Vermont Castings Group  
149 Cleveland Drive, Paris, Kentucky 40361  
[monessenhearth.com](http://monessenhearth.com)

Your Monessen Dealer:



FPO  
for FSC  
certification  
mark

To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice.  
©2014 Vermont Castings Group

For more information about VCG and Monessen efficient and environmentally friendly products, please visit [monessenhearth.com](http://monessenhearth.com).

MON8208 Ver9